

LWA300A LWA300B LWA300C

USER MANUAL


LED OUTDOOR WALL LAMP

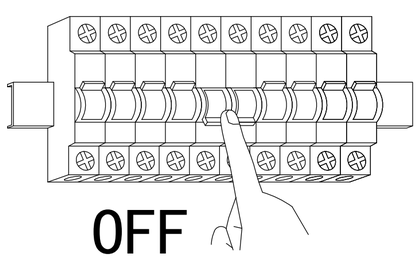


01

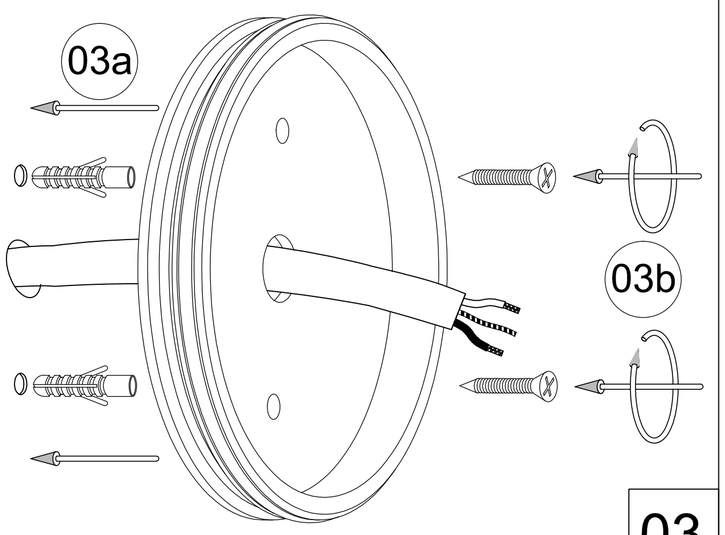


03

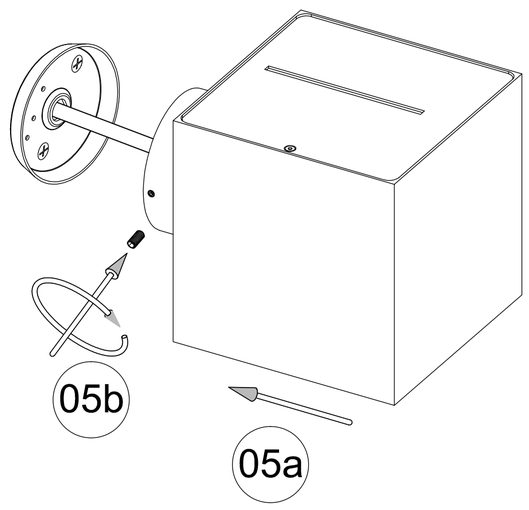


05

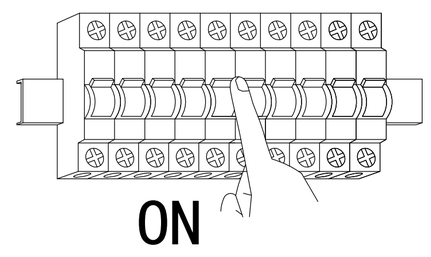


06

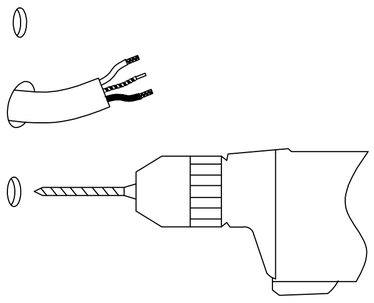


02

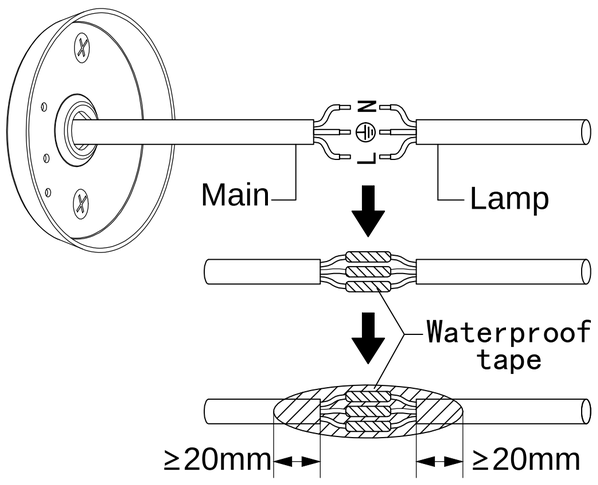

04

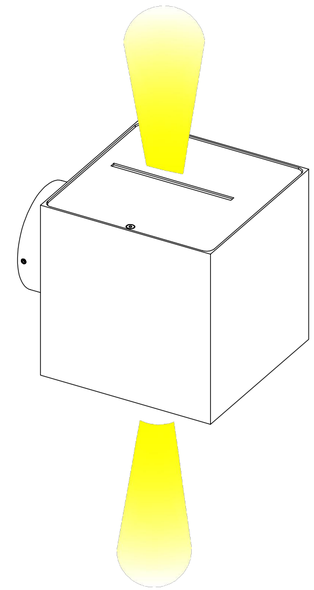


07

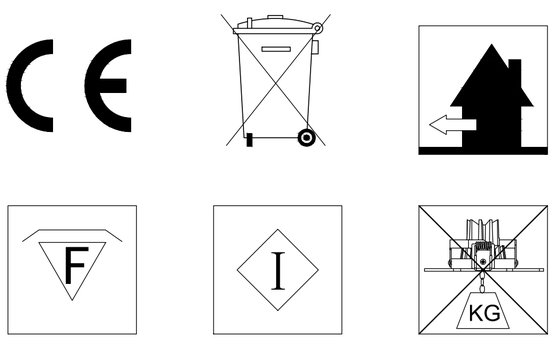


Accessories	Accessories
2mm Allen Key	expansion plug 2pcs screw 2pcs


01.SWITCH OFF MAIN
02.MAKE HOLE PATTERN
03.INSTALL THE BASE PLATE
04.CONNECT LAMP TO THE MAIN
05.DRIVE IN THE SCREWS UNTILL TIGHT
06.SWITCH ON THE MAIN AND LIGHT ON



LWA300A
L166xW130xH130(mm)
SMD-3W



LWA300B
L166xW130xH130(mm)
SMD-2x3W



LWA300C
L166xW130xH130(mm)
SMD-4x3W

Lamp:SMD-2835 LED
Color：2700K/3000K/4000K/6000K
Color rendering：Ra80
Input：100V-240V AC
Current：Constant 300mA
Frequency：50/60Hz
Watt：3W/2x3W/4x3W
Life span：20,000hrs
Operating temp：-20℃-+40℃
IP65
Dimmable：NO

Cautions: a.Installed by qualified electrician
b.Use only power-supply supplied
by manufacturer for products guarantee